

# UTILITY PATENT APPLICATION TRANSMITTAL

(Only for new nonprovisional applications under 37 CFR 1.53(b))

Attorney Docket No. 35.C14864

First Named Inventor or Application Identifier

SHUMPEI TAKENAKA ET AL.

Express Mail Label No.

Commissioner for Patents  
Box Patent Application  
Washington, DC 20231

## APPLICATION ELEMENTS

See MPEP chapter 600 concerning utility patent application contents.

## ADDRESS TO:

1. ☒ Fee Transmittal Form  
(Submit an original, and a duplicate for fee processing)

2. ☐ Applicant claims small entity status.  
See 37 CFR 1.27.

3. ☒ Specification Total Pages 18

4. ☒ Drawing(s) (35 USC 113) Total Sheets 9

5. ☐ Oath or Declaration Total Pages

- a. ☐ Newly executed (original or copy)

- b. ☐ Copy from a prior application (37 CFR 1.63(d))  
(for continuation/divisional with Box 17 completed)  
[Note Box 6 below]

- i. ☐ DELETION OF INVENTOR(S)  
Signed Statement attached deleting inventor(s)  
named in the prior application, see 37 CFR  
1.63(d)(2) and 1.33(b)

6. ☒ Application Data Sheet. See 37 CFR 1.76

7. ☐ CD-ROM or CD-R in duplicate, large table or Computer  
Program (Appendix)

8. ☐ Nucleotide and/or Amino Acid Sequence Submission  
(if applicable, all necessary)

- a. ☐ Computer Readable Form (CRF)

- b. Specification Sequence Listing on:

- i. ☐ CD-ROM or CD-R (2 copies); or

- ii. ☐ paper

- c. ☐ Statements verifying identity of above copies

## ACCOMPANYING APPLICATION PARTS

9. ☐ Assignment Papers (cover sheet & document(s))

10. ☐ 37 CFR 3.73(b) Statement ☐ Power of Attorney  
(when there is an assignee)

11. ☐ English Translation Document (if applicable)

12. ☐ Information Disclosure  
Statement (IDS)/PTO-1449 ☐ Copies of IDS  
Citations

13. ☐ Preliminary Amendment

14. ☒ Return Receipt Postcard (MPEP 503)  
(Should be specifically itemized)

15. ☐ Certified Copy of Priority Document(s)  
(if foreign priority is claimed)

16. ☐ Other:

17. If a CONTINUING APPLICATION, check appropriate box and supply the requisite information.

- ☐ Continuation ☐ Divisional ☐ Continuation-in-part (CIP) of prior application No. /  
Prior application information. Examiner Group/Art Unit.

For CONTINUATION OR DIVISIONAL APPS only. The entire disclosure of the prior application, from which an oath or declaration is supplied under Box 5b, is considered a part of the disclosure of the accompanying continuation or divisional application and is hereby incorporated by reference. The incorporation can only be relied upon when a portion has been inadvertently omitted from the submitted application parts.

## 18. CORRESPONDENCE ADDRESS

05514

- ☒ Customer Number or Bar Code Label

(Insert Customer No. or Attach bar code label here)

- or ☐ Correspondence address below

NAME

Address

City

State

Zip Code

Country

Telephone

Fax

CLAIMS	(1) FOR	(2) NUMBER FILED	(3) NUMBER EXTRA	(4) RATE	(5) CALCULATIONS
TOTAL CLAIMS (37 CFR 1.16(c))		14-20 =	0	X \$ 18.00 =	\$0
INDEPENDENT CLAIMS (37 CFR 1.16(b))		8-3 =	5	X \$ 80.00 =	\$400.00
MULTIPLE DEPENDENT CLAIMS (if applicable) (37 CFR 1.16(d))				\$270.00 =	\$0
				BASIC FEE (37 CFR 1.16(a))	\$710.00
Total of above Calculations =					\$1110.00
Reduction by 50% for filing by small entity (Note 37 CFR 1.9, 1.27, 1.28).					0
TOTAL =					\$1110.00

## 19. Small entity status

- a. ☐ A small entity statement is enclosed
- b. ☐ A small entity statement was filed in the prior nonprovisional application and such status is still proper and desired.
- c. ☐ Is no longer claimed.

20. ☒ A check in the amount of \$ 1110.00 to cover the filing fee is enclosed.

21. ☐ A check in the amount of \$ \_\_\_\_\_ to cover the recordal fee is enclosed.

22. The Commissioner is hereby authorized to credit overpayments or charge the following fees to Deposit Account No. 06-1205

- a. ☒ Fees required under 37 CFR 1.16.
- b. ☒ Fees required under 37 CFR 1.17.
- c. ☐ Fees required under 37 CFR 1.18.

## SIGNATURE OF APPLICANT, ATTORNEY, OR AGENT REQUIRED

NAME	Jack M. Arnold
SIGNATURE	<i>Jack M. Arnold Reg. No. 25,823</i>
DATE	October 10, 2000

INVENTOR INFORMATION

Inventor One Given Name:: SHUMPEI  
Family Name:: TAKENAKA  
Postal Address Line One:: 2-19, Tsukimino 4-chome,  
City:: Yamato-shi  
State or Province:: Kanagawa-ken,  
Country:: Japan  
Inventor Two Given Name:: YUKINOBU  
Family Name:: SUWA  
Postal Address Line One:: 20-23-804, Mitsuzawa Shimo-machi,  
Postal Address Line Two:: Kanagawa-ku  
City:: Yokohama-shi,  
State or Province:: Kanagawa-ken  
Country:: Japan

CORRESPONDENCE INFORMATION

Correspondence Customer Number:: 05514  
Fax:: (212) 218-2200

APPLICATION INFORMATION

Title Line One:: IMAGE PROCESSING APPARATUS AND METHOD  
Title Line Two:: THEREFOR

Total Drawing Sheets:: 9  
Formal Drawings?: Yes  
Application Type:: Utility  
Docket Number:: 35.C14864  
Secrecy Order in Parent Appl.?: No

REPRESENTATIVE INFORMATION

Representative Customer Number:: 5514

PRIOR FOREIGN APPLICATIONS

Foreign Application One:: 11-289375  
Filing Date:: 12, October, 1999  
Country:: Japan  
Priority Claimed:: Yes

00655737.101100

# IMAGE PROCESSING APPARATUS AND METHOD THEREFOR

## BACKGROUND OF THE INVENTION

### Field of the Invention

5           The present invention relates to an image  
processing apparatus for efficiently arranging and  
printing, on a designated sheet, all the image data or  
selected ones thereof, obtained by a device such as a  
digital camera or the like and stored in a memory  
10       medium, and an image processing method and a memory  
medium adapted for use therefor.

### Related Background Art

          In case of printing plural images on a printing  
sheet by designating division therein in a conventional  
15       printing apparatus, the number of printed images, the  
printing positions and the printing areas are defined  
as invariable values, so that the sheet and the images  
to be printed are designated in the unit of each sheet.

          Also in such conventional printing apparatus, in  
20       case of printing plural desired images on a printing  
sheet, the images are printed as a size according to  
the sheet size, so that the magnification of the images  
varies according to the sheet size and it is not  
possible to print the desired image with the desired  
25       size on the sheet.

09585737.101300

# SUMMARY OF THE INVENTION

In consideration of the foregoing, the image processing apparatus of the present invention is characterized by designation means for designating the size of the image to be printed on the sheet, and process means for executing a process of printing the image designated by the designation means.

The image processing apparatus of the present invention is also characterized by designation means for designating the image size to be printed on the sheet and means for executing a layout process for the sheet with the image size designated by the designation means.

The image processing apparatus of the present invention is also characterized by designation means for designating the sizes of the images to be printed on a page, means for designating the number of images, and process means for editing and printing, on a page, with a layout based on the images according to the designation by the designation means.

The image processing apparatus of the present invention is also characterized by designation means for designating the images to be printed and the partition of the images for changing the page, and process means adapted, in printing the images designated by the designation means, to execute a page changing process upon detection of the partition of the

09085737-101100

images designated by the designation means.

#### BRIEF DESCRIPTION OF THE DRAWINGS

Fig. 1 is a block diagram of a control apparatus  
5 for an electronic image;

Fig. 2 is a flow chart showing an example of  
printing control;

Fig. 3 is a flow chart showing an example of  
printing control with priority on the number of images;

10 Fig. 4 is a flow chart showing printing control in  
case the image size and the number of images are both  
designated;

Fig. 5 is a flow chart for a condition setting 1;

Fig. 6 is a flow chart for a condition setting 2;

15 Fig. 7 is a flow chart for a condition setting 3;

Fig. 8 is a flow chart for a condition setting 4;

Figs. 9A and 9B are respectively a block diagram  
and an external view of a digital camera;

20 Fig. 10 is a flow chart for condition setting with  
the digital camera; and

Figs. 11A, 11B and 11C are views showing example  
of images printed on a sheet.

#### DETAILED DESCRIPTION OF THE PREFERRED EMBODIMENTS

25 Now the present invention will be explained by  
embodiments thereof, with reference to the accompanying  
drawings.

09585737-104100

Fig. 1 is a block diagram of a control apparatus for an electronic image. As an external memory device 2, a non-volatile memory medium can be chosen as an example. An external memory device 2 is detachably mountable on a digital camera and also on the present control apparatus, and stores the image data taken for example by the digital camera as an image file. The above-mentioned non-volatile memory medium may also contain a print object designation/condition file for defining the print object image and the print condition such as the printing sheet. Also instead of employing the detachable memory medium, the control apparatus in the present invention may incorporate a memory device for storing a file transferred directly from the digital camera or through a memory medium.

The image designation for arranging images on a sheet is executed from an input part 6. Such image designation includes the setting of various conditions for example of designation of a sheet size such as B4, A4, B5 or A5, that of a print sheet size such as a whole sheet, a half sheet, a quarter sheet or a sixth sheet of the newspaper size, number of image divisions per printing sheet or image size (represented by sheet size or by image dimension), the designation of an appropriate layout mode. When the image signal is selected and designated, the number thereof is from time to time stored in an image printing object

register area 8A in a memory 8, and the number of an image counter area 8B in the memory 8 is at the same time increased by one and is newly stored in a total image number register 8C therein. Then, as a condition for arranging and printing plural images on a page, a partition number for designating the number of divisions or the number of images to be arranged on a page is entered manually from the input part 6 and is stored in a partition number register 8D of the memory 8. Similarly the desired number of sheets is stored in a page number register 8E in the memory 8, and the desired print sheet size is stored in a page size register 8F. Also the desired image size is stored in an output image size register 8G.

A partition number register 8D in the memory 8 stores a number of additional images and a condition of layout permissible in case of maintaining the printed image size, determined from the sheet and the partition number, and the minimum distance of the images, by referring to a partition table based on the maximum partition layout condition and the partition number at the completion of sheet setting. A decode/distribution process distributes and stores, in case an external memory device 2 (for example a non-volatile memory medium storing image data) contains an image to be printed and a condition designating file corresponding to the image, the results of decoding of such content

09685737-101100



in the total image number register 8C, the image  
printing object register 8A, the partition number  
register 8D, the page number register 8E, the page size  
register 8F and the output image size register 8G. An  
5 image decode/decompression process executes decoding of  
the compressing condition of data compressed for  
example by JPEG and decompression of the data. Pixel  
information 18 obtained by the image  
decode/decompression part 3 is supplied to a central  
10 processing unit (CPU) 1, and the layout condition is  
determined from the print output size and the output  
resolution, by referring to the areas in the memory 8,  
namely the total image number register 8C, the image  
printing object register 8A, the partition number  
15 register 8D, the page number register 8E, the sheet  
size register 8F and the output image size register 8G.  
A printing device 5 converts the image data,  
decompressed according to the result of the CPU 1, into  
print data matching the printing apparatus and  
20 transfers such print data thereto. For calculating the  
layout condition, the CPU 1 acquires and stores in  
advance various conditions relating to the print layout  
such as the printable area, through a print control  
part. Programs corresponding to the flow charts shown  
25 in Figs. 2 to 8 are stored in a read-only memory (ROM)  
of a memory 7 shown in Fig. 1, and are executed by the  
CPU. The programs stored in the ROM may be stored in

05685737.1011001

another memory medium or may be loaded from an external memory into an internal memory.

5 In the embodiment of the present invention, in a printing apparatus provided with means for entering image number information etc. for specifying the image data stored in the non-volatile memory medium, a control part for decoding and decompressing the image data, a control part for printing the image data and decoding means for the non-volatile memory medium  
10 storing the print object and condition designating file prepared in advance by image designating means outside the present apparatus for example that of a digital camera, the print object image information obtained by an input of the print object image number or by  
15 decoding the print object and condition designating file is stored in a specified memory part of the apparatus, and the images designated by thus stored information are arranged in succession on the printing sheet according to the image layout condition of the  
20 designated sheet whereby the printing with automatic page change is continued until all the images are printed.

At first reference is made to Fig. 5 for explaining a first condition setting process for  
25 designating an image.

At first, in a step S11, an image to be designated is entered manually from the input part 6. Then a step

09555737, 101100

5           Then reference is made to Fig. 6 for explaining a  
second condition setting process for designating the  
sheet size.

Then reference is made to Fig. 7 for explaining a third condition setting process for designating the partition number.

Then reference is made to Fig. 8 for explaining a  
20 fourth condition setting process for designating an  
image size.

In the following there will be explained, with reference to Fig. 2, a process in case the printing is

5

10

15

20

25

next image  $G_{n+1}$  is present. If not, step S1811 sends an image layout storing the images up to the image  $G_{n+1}$  to the printing apparatus and executes output on the output sheet as shown in Fig. 11A. If affirmative, a  
5 process for adding  $N+1$  into  $N$  ( $N = N+1$ ) is executed in step S1807, and it is checked whether the image  $G_n$  is added to the image layout on the sheet in step S1808. That is, there is checked, from the sheet size and the image size, whether the plural images can be laid on  
10 the sheet. If the result is negative, the images up to  $G_{n+1}$  stored in the image layout register is output to the printing sheet in step S1809. If the result in the step S1804 is negative, step S1810 executes output to the image layout register by reducing the output size  
15 on the sheet, and then to the printing apparatus for printing as shown in Fig. 11C. Then there is executed a process  $N = N+1$  on the register  $N$ , and the sequence returns to step S1804.

In case step S1802 identifies that the priority is  
20 given to the image size and the number of images is not automatically set, the sequence proceeds to the flow chart shown in Fig. 3, wherein step S1901 discriminates whether the priority is given to the number of images and the image size is automatically set.

25 If affirmative, step S1902 checks the sheet size, then stores the designated number of images in the image layout register of the memory 8 according to a

template, and then the images are printed on the output sheet (S1903). Then there is searched, in the memory medium of the external memory device, whether a next image is present (S1904). If present, the sequence returns to step S1902, but, if not, the sequence is terminated.

If the result of step S1901 is negative, the sequence proceeds to the flow chart shown in Fig. 4.

In step S2001, it is checked whether the image size and the number of images are both designated. If the both designations are absent, the sequence is terminated, but, if they are present, the sequence proceeds to step S2002 for discriminating whether the designated output is possible on the sheet. If the designated output is possible, there are executed the output of a sheet (step S2007) and a page change process for proceeding to a next sheet (step S1008). On the other hand, if the designated output is not possible, an image is arranged with priority on the image size in step S2003. Then step S2004 discriminates whether at least an image can be placed. If possible, there is executed output (step S2005), but, if not, there is executed output with a reduction in the size (step S2009). Then step S2006 checks whether a next image is present. If absent, the sequence is terminated, but, if present, the sequence returns to step S2001 for repeating the above-described

procedure.

Fig. 9A is a block diagram of a digital camera 100 shown in Fig. 9B, wherein an input part 101 is used for designating the setting of mode etc. A processing part 5 102 includes a CPU 1021, a ROM 1022, and a RAM 1023. The ROM 1022 stores the procedure shown in Fig. 10. The RAM 1023 stores an image fetched by the input means in correlation with the image size designated by the designation means for designating the image size. The 10 RAM 1023 corresponds to the memory 8 shown in Fig. 1. An image is taken from an input part 101 or an image pickup part, and the image and the attribute information defined therefor are stored through an external memory device 104. Such external memory 15 device 104 corresponds to the external memory device 2 shown in Fig. 1.

At first the taken image is displayed on a display device 103. Then, according to a program of the ROM 7, there are entered, from the input part 101, the size of 20 the image to be outputted and the instruction for example for executing or not the printing. Fig. 10 shows the process flow to be executed by the CPU for defining the image size (large (L), medium (M) or small (S)) for the image. The display device 103 displays 25 the image, and, in such display state, the image size for such image is entered from the input part (steps S2101, S2111, S2121). The image and the image size

09855737.101100

data are stored in an external memory device 104 (steps S2101, S2112, S2122).

In the foregoing embodiment, the image control apparatus for executing the image control can be a  
5 digital camera, a computer or an image printing order receiving processing device (i.e. printer).

Also an image processing software may be utilized within each device.

The present invention allows to obtain the print  
10 result desired by the user with the designation of the image size, in contrast to the conventional method in which the image designation and the printing operation have to be repeated in the unit of each page.  
Consequently it is rendered possible to executing the  
15 printing without size designation at the printing operation, and, as the output size can also be designated on the displayed image instead of on the printing, the image can be reproduced with the desired size on the display, so that the image can be rendered  
20 visible in the desired size, in a simpler manner than in the conventional technology.

0905737.101.100



WHAT IS CLAIMED IS:

1. An image processing apparatus comprising:  
designating means for designating the image size  
of an image to be printed on a sheet; and  
5 process means for executing a page change process  
for each layout of the image size designated by said  
designation means.
- 10 2. An image processing apparatus according to  
claim 1, further comprising printing means for printing  
an image.
- 15 3. An image processing apparatus comprising:  
designating means for designating the size of  
images to be printed on a page;  
designating means for designating the number of  
images to be printed on a page; and  
20 process means for executing a process of printing  
images on a page according to the designation by either  
of said designation means.
- 25 4. An image processing apparatus according to  
claim 3, further comprising printing means for printing  
said images.
5. An image processing method comprising:  
a step of designating the image size of an image

00665737 101100

to be printed on a sheet; and

a process step of executing a page change process for each layout of the image size designated by said designation step.

5

6. An image processing method according to claim 5, further comprising a printing step of printing an image.

10

7. A memory medium comprising:

a step of storing the image size of an image to be printed on a sheet, designated by designation means; and

15

a process step of executing a page change process for each layout of the image size designated by said storing step.

20

8. A memory medium comprising:

a memory step of storing the image size of images to be printed on a page, designated by designation means;

25

a memory step of storing the number of images to be printed on a page, designated by designation means; and  
a process step of executing a process of layout of images on a page based on the image size or the number of images stored in either of the foregoing steps.

09665737-101100

9. An image processing apparatus comprising:  
image fetching means for fetching an image;  
designation means for designating the size of the  
image to be printed on a sheet; and

5 memory control means for storing, in mutual  
correlation, the image fetched by said image fetching  
means and the image size designated by said designation  
means.

10 10. An image processing apparatus according to  
claim 9, wherein said image fetching means includes  
image pickup means for taking an image.

11. An image processing apparatus according to  
15 claim 10, wherein said image fetching means is adapted  
to fetch the image taken by said image pickup means  
through a memory medium.

12. An image processing apparatus according to  
20 claim 11, wherein said memory medium is detachable.

13. An image processing apparatus comprising:  
designation means for designating the image size  
of the image to be outputted; and

25 process means for executing a page change process  
for each layout with the image size designated by said  
designation means.

00447 263860

14. An image processing apparatus comprising:  
means for receiving images with designated image  
sizes, to be printed on a sheet; and  
means for executing layout of the said images and  
outputting said images, with the mutual correlation of  
the image fetched by said receiving means and the  
designated image size.

# ABSTRACT OF THE DISCLOSURE

In conventional printing apparatus, in case of printing plural desired images on a printing sheet, the images are printed as a size according to the sheet size, so that the magnification of the images varies according to the sheet size and it is not possible to printing the desired image with the desired size on the sheet.

In order to solve the foregoing problem, it is provided, an apparatus for designating the size of an image to be printed on a sheet, arranging images on a sheet.

0655737-101136

FIG. 1

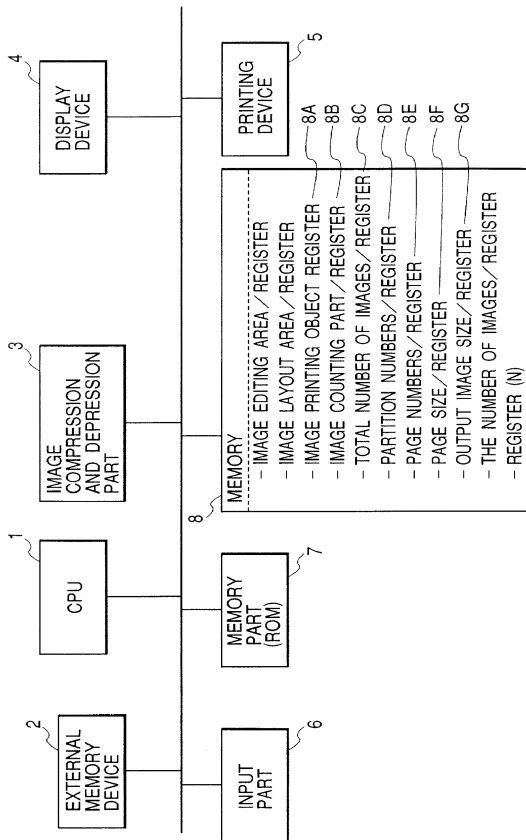


FIG. 2

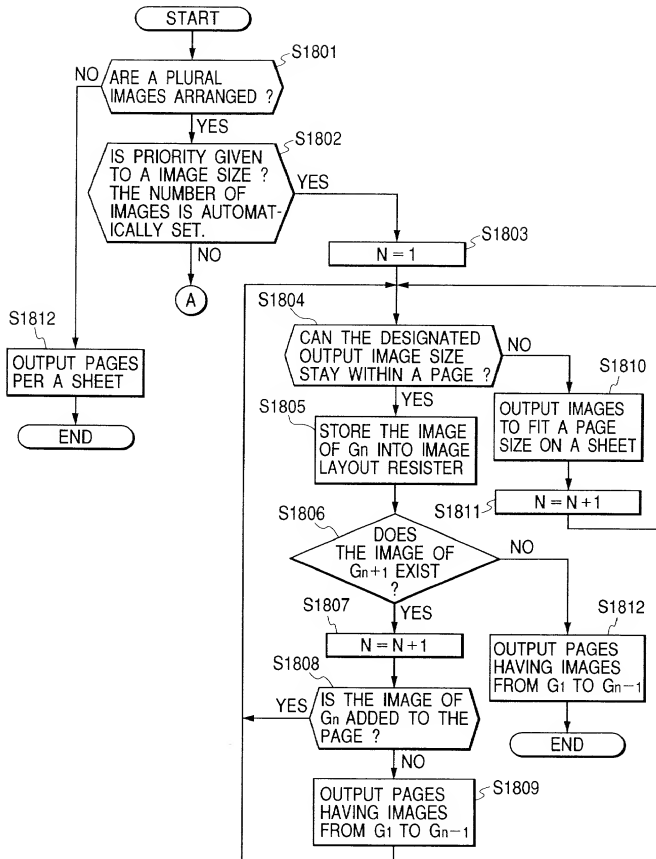


FIG. 3

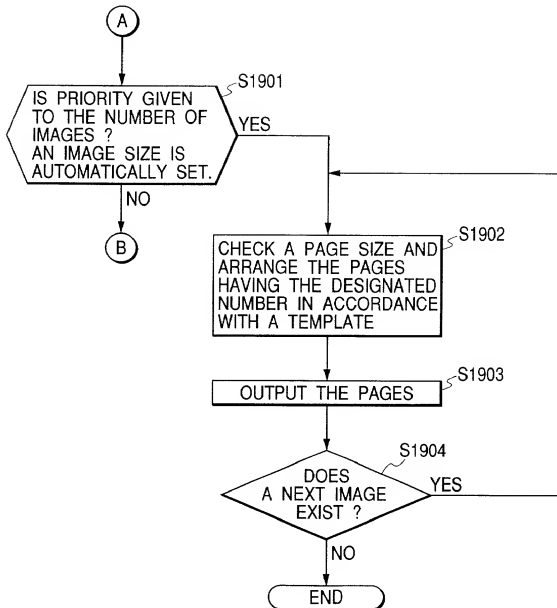




FIG. 4

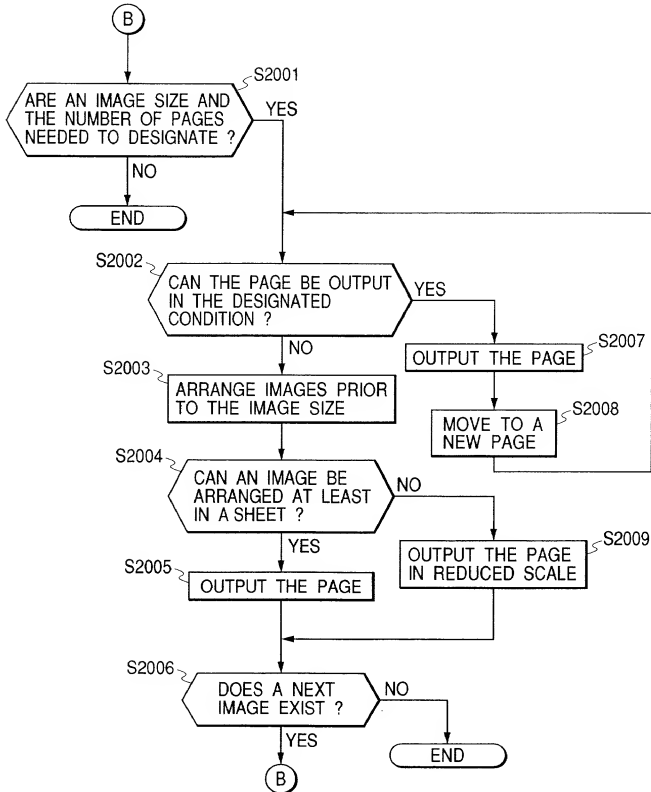


FIG. 5

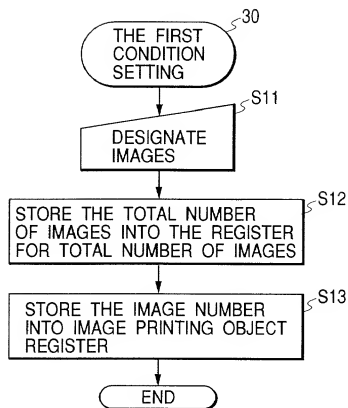


FIG. 6




FIG. 7

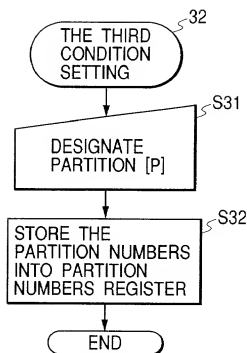


FIG. 8




FIG. 9A

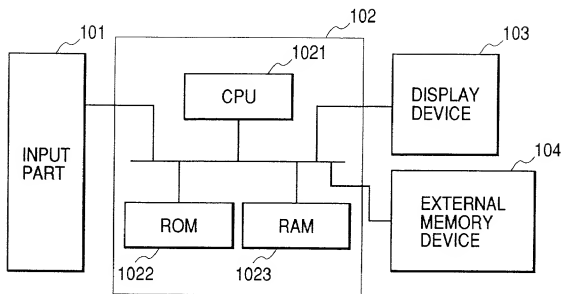


FIG. 9B



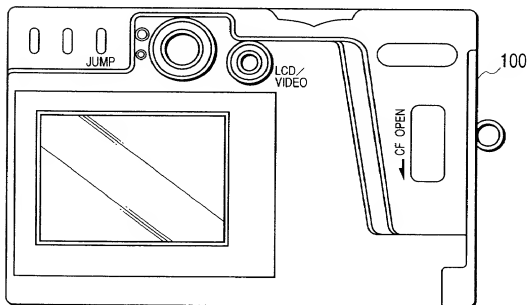



FIG. 10

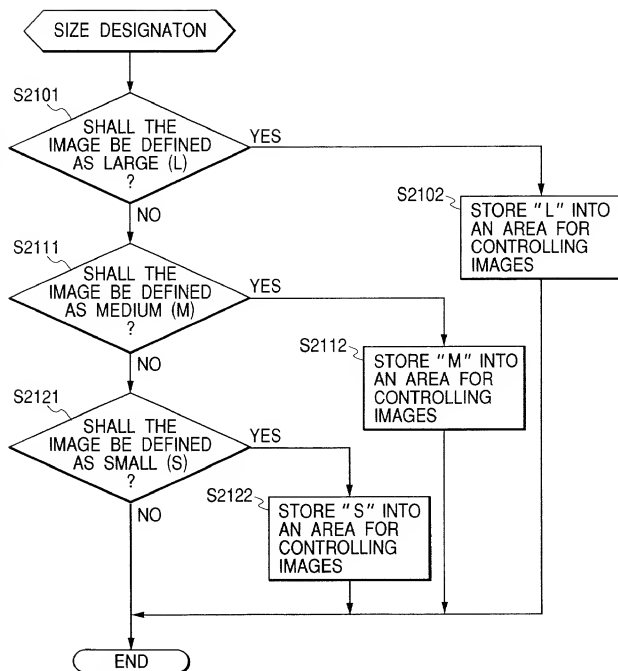

*FIG. 11A*

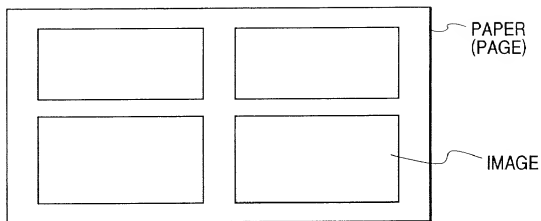

*FIG. 11B*

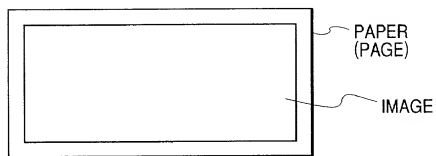

*FIG. 11C*

